


D95

Recessed spotlights 12W

- aluminum die-cast housing with passive cooling design
- modular designed housing for easy mounting
- rated voltage 220--240V 50...60Hz
- high-efficiency LED COB
- beam angle available in spot, medium, flood and wide flood
- secondary reflector with multi-finish
- powder coated finish in white and black
- Protection rating IP20 (standard) IP65 (optional)

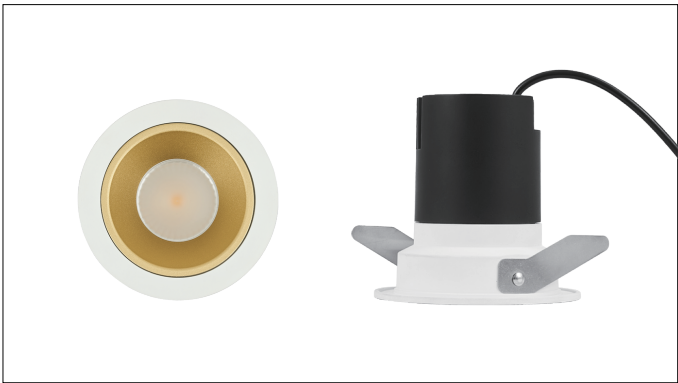

Rated Voltage
220--240V

Beam angle

15° spot

24° medium

36° flood

60° wide flood

Frequency
50...60Hz

Trim color

RAL 9016

RAL 9005

Ø 95
90
Ø75mm
0.30kg

available finish for secondary reflector

chrome

matt silver

white

piano black

matt black

anthracite

brass

golden

copper

Ordering information

Item no.	Description	Color	Beam angle
3001.01	recessed downlight housing	structure white	-
3001.02	recessed downlight housing	structure black	-
RE433301	aluminum reflector spot	-	15°
RE433302	aluminum reflector medium	-	24°
RE433303	aluminum reflector flood	-	36°
RE433304	aluminum reflector wide flood	-	60°
0001.01	secondary reflector	chrome	-
0001.02	secondary reflector	matt silver	-
0001.03	secondary reflector	white	-
0001.04	secondary reflector	piano black	-
0001.05	secondary reflector	matt black	-
0001.06	secondary reflector	anthracite	-
0001.07	secondary reflector	brass	-
0001.08	secondary reflector	golden	-
0001.09	secondary reflector	copper	-