MEDO

3-phase track spotlights 30W


- with 3-phase adapter driver
- compatible with GLOBAL 3-phase tracks
- rated voltage 220--240V 50...60Hz
- aluminum die casting housing
- Zhaga standard for fitting different branded LED COB module
- beam angle available in spot, medium, flood and wide flood
- powder coated finish in silver, white and black
- Horizontal 355°, Tilting 90°









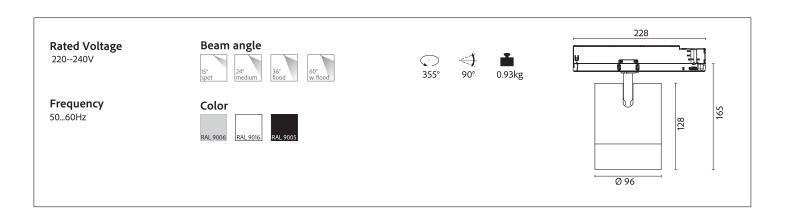

Ordering information

| Item no. | Description | Color | Beam angle |
|----------|---------------------------------|------------------|------------|
| 1021.01 | 3-phase track spotlight housing | structure silver | - |
| 1021.02 | 3-phase track spotlight housing | structure white | - |
| 1021.03 | 3-phase track spotlight housing | structure black | - |
| RE85501 | aluminum reflector spot | - | 15° |
| RE85502 | aluminum reflector medium | - | 24° |
| RE85503 | aluminum reflector flood | - | 36° |
| RE85504 | aluminum reflector wide flood | - | 60° |